

Ref : 13094006 < or = 125 A  
 Ref : 13094016 = 160 A

**ATyS M 3s**  
**ATyS M 6s**

- 10 to 70 mm<sup>2</sup> # 8 to # 00 AWG
- 6 to 50 mm<sup>2</sup> # 10 to # 00 AWG
- 15 mm / 0,59"

Hexagonal Metric Allen size 4 44,1 lb-in 5,0 Nm

Ref : 13090001

- 0,5 to 2,5 mm<sup>2</sup> # 20 to # 14 AWG
- 0,5 to 1,5 mm<sup>2</sup> # 20 to # 16 AWG
- 6 mm / 0,236"
- Slotted head 3,0 mm 4,4 lb-in 0,5 Nm

Posidriv PZ2 8,8 lb-in 1 Nm



Ref : 2294016

Slotted head 3,5 mm 3,97 lb-in 0,45 Nm

Hexagonal Metric Allen size 4 44,1 lb-in 5,0 Nm

Slotted head 3 mm 3,97 lb-in 0,5 Nm

Posidriv PZ2

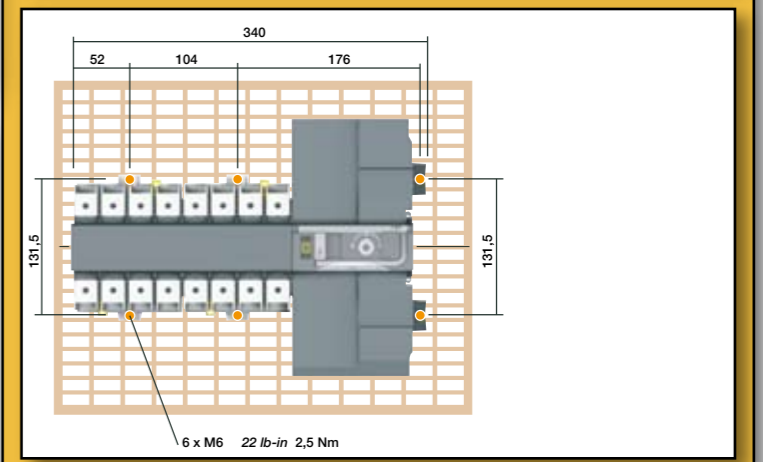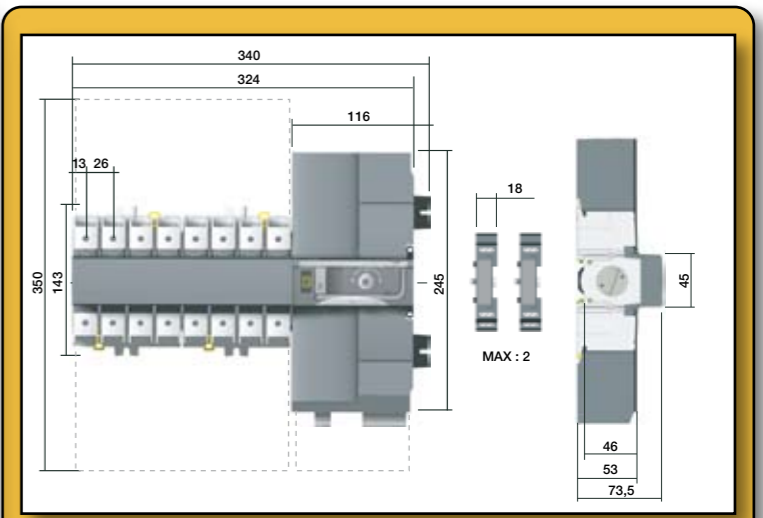

Ref : 13994006

Slotted head 3,5 mm 3,97 lb-in 0,45 Nm

Hexagonal Metric Allen size 4 44,1 lb-in 5,0 Nm

Slotted head 3 mm 3,97 lb-in 0,5 Nm

Slotted head 3,5 mm 3,97 lb-in 0,45 Nm

Hexagonal Metric Allen size 4 44,1 lb-in 5,0 Nm

Slotted head 3 mm 3,97 lb-in 0,5 Nm


STEP 1, STEP 2, STEP 3, STEP 4

Posidriv PZ2 2,2 lb-in 0,25 Nm

OK!

RAIL IEC 60715

Posidriv PZ2 8,8 lb-in 1 Nm

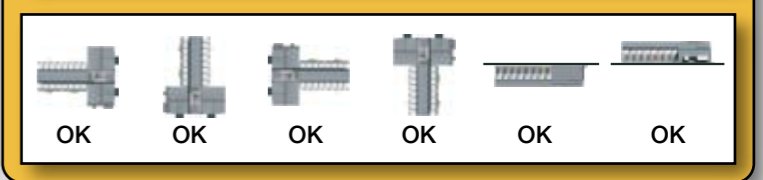

hygrometry : \* 80% humidity without condensation at 5° C \* 95% humidity with condensation at 40° C

altitude : max 2 000 m without de-rating

temperature : \* -10 +40° C without de-rating \* -20 +70° C with de-rating

mass : 5 kg

storage : \* temperature -20 to +70° C \* period : 1 year max

**socomec**  
 Innovative Power Solutions  
 INSTRUCTIONS SHEET IS 533357-C  
 More information WEB www.socomec.com




**OPERATION**

AUT Click


Hexagonal Metric Allen size 5 Max 88,2 lb-in 10 Nm

4 mm min 3/16" min 8 mm max 5/16" max

# ATyS M 3s

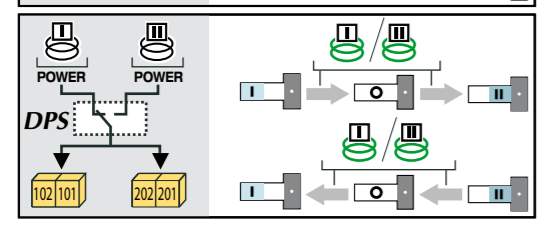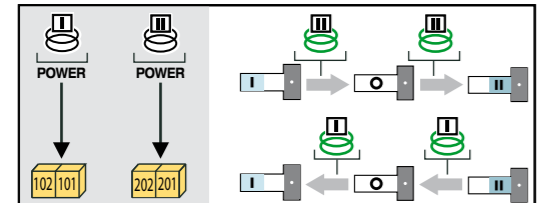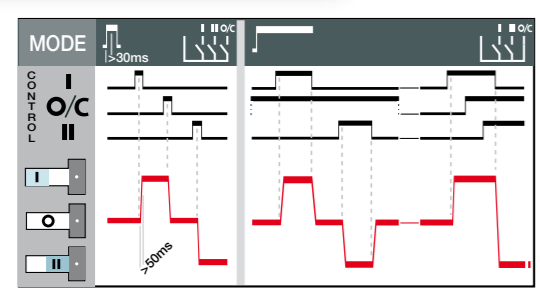


DPS Ref.: 15994001

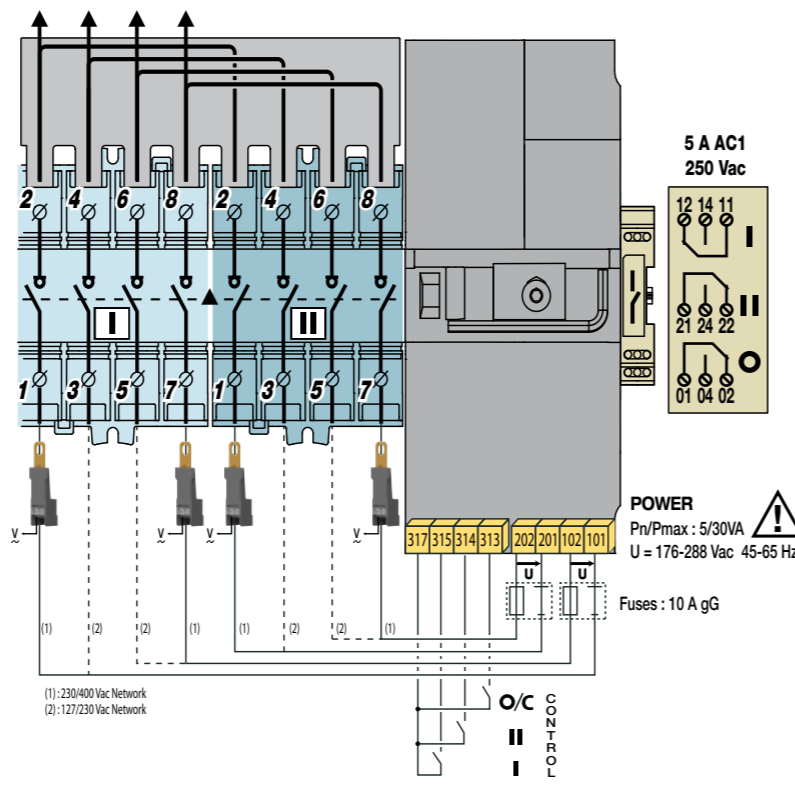





## STEP 1






## STEP 2

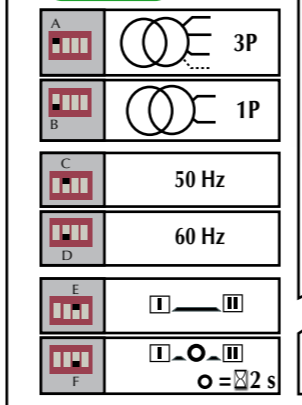


## STEP 3

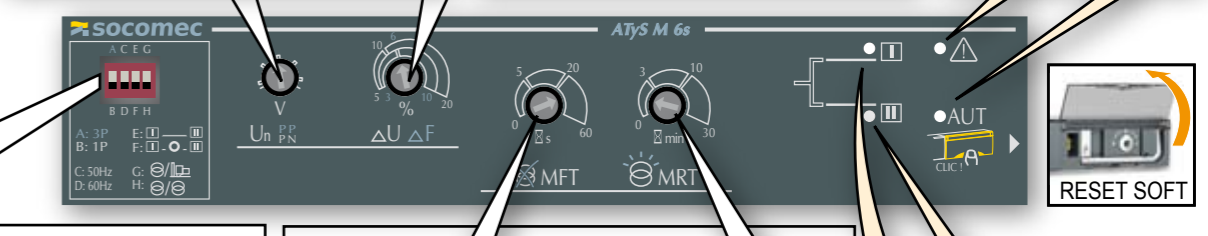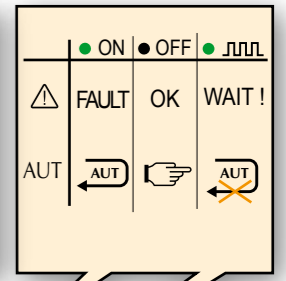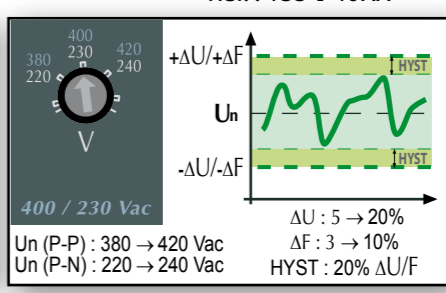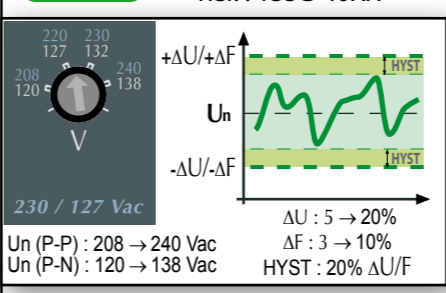

## STEP 4

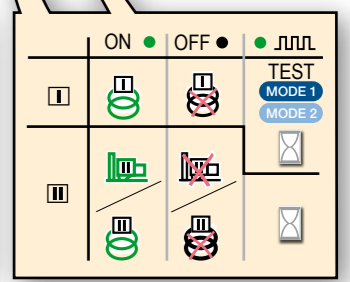


# ATyS M 6s

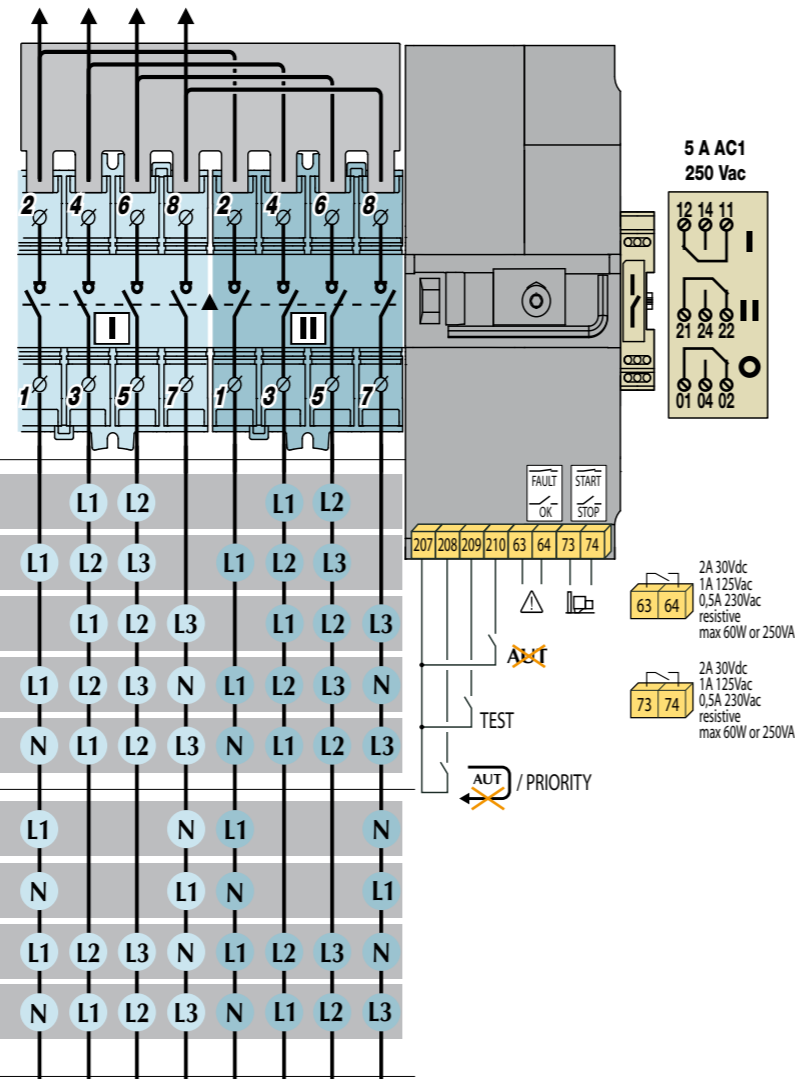

### 127/230 Vac Network

Ref.: 1353 40XX



### 230/400 Vac Network

Ref.: 1354 40XX

