

### Midi free-standing Beacons / EvoSIGNAL

# Midi TwinFLASH 12/24VAC/DC RD



Part No.:	261.120.70		RoHS2		UK
Series:	<b>EvoSIGNAL Midi</b>	7	<b>КОП</b> 32	c <b>GL</b> ) us	CA

MECHANICAL DATA		
Height	130 mm	
Diameter	85 mm	
Materials	PC PC/ABS	
Dome colour	Red	
Housing colour	Grey	
Protection category	IP66	
Connection	Push-in terminal	
cross-sectional area minimum	0,25mm² / 24AWG	
cross-sectional area maximum	1,50mm² / 16AWG	
Working temperature minimum	-30°C	
Working temperature maximum	+60°C	
Weight with packaging	186 g	
Product weight	148 g	

ELECTRICAL DATA		
Operating voltage	12V 24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	12 VDC	
Rated operational current	150 mA	
Rated inrush current	1A	
Protection class	Protection class 2	
Pollution degree	3	
Overvoltage category	III	

OPTICAL DATA		
Light source	LED	
Light colour	Red	
Optical signal image	EVS Flash TwinFlash	
Flash frequency	1 Hz	
Service life optical	50,000 h minimum	
Pulse- & pause Duration [ms]	28ON, 164OFF, 28ON, 744OFF	

APPROVAL DATA	
Conforms with CE	Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### Midi free-standing Beacons / EvoSIGNAL

# Midi TwinFLASH 12/24VAC/DC RD


WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	469

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi free-standing Beacons / EvoSIGNAL

# Midi TwinFLASH 12/24VAC/DC RD

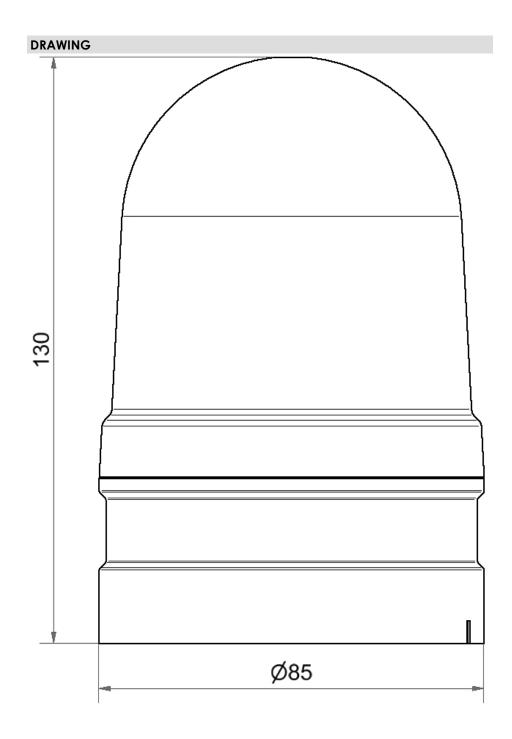

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.