

Midi free-standing Beacons / EvoSIGNAL

Midi Rotating 12/24V AC/DC RD



Part No.:	261.140.70		R oHS₂	(II)	UK
Series:	EvoSIGNAL Midi	7	KOH52	c QL) us	CA

MECHANICAL DATA		
Height	130 mm	
Diameter	85 mm	
Materials	PC PC/ABS	
Dome colour	Red	
Housing colour	Grey	
Protection category	IP66	
Connection	Push-in terminal	
cross-sectional area minimum	0,25mm² / 24AWG	
cross-sectional area maximum	1,50mm² / 16AWG	
Working temperature minimum	-30°C	
Working temperature maximum	+60°C	
Weight with packaging	210 g	
Product weight	170 g	

ELECTRICAL DATA		
Operating voltage	12V 24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	12 VDC	
Rated operational current	120 mA	
Rated inrush current	1A	
Protection class	Protection class 2	
Pollution degree	3	
Overvoltage category	III	

OPTICAL DATA		
Light source	LED	
Light colour	Red	
Optical signal image	Revolving	
Service life optical	50,000 h minimum	
Rotation speed (rpm)	180 U/min	
Pulse- & pause Duration [ms]	55ON, 278OFF	

APPROVAL DATA		
Conforms with CE	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi free-standing Beacons / EvoSIGNAL

Midi Rotating 12/24V AC/DC RD


Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	
MTTF-value [years]	406	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi free-standing Beacons / EvoSIGNAL

Midi Rotating 12/24V AC/DC RD

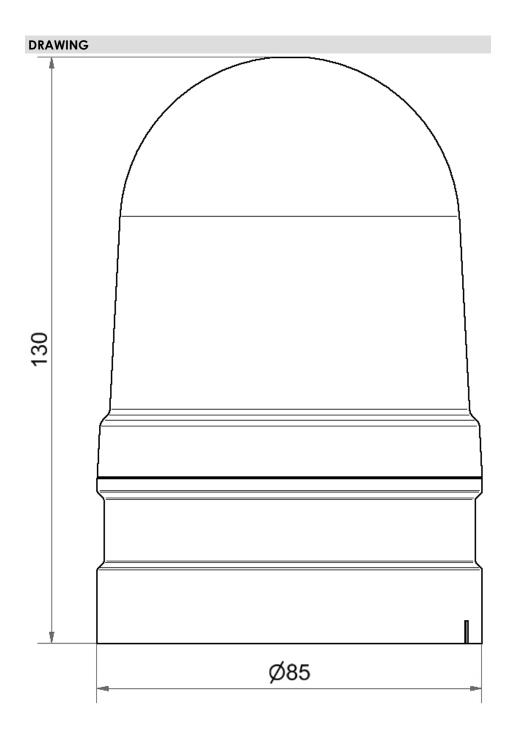

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.