

Control Stations ø 22

► CONTROL STATIONS - NON-ILLUMINATED

 Technical Info (p. 103)


MUSHROOM HEAD ø 40 - MAINTAINED

Key to reset




Part Number



LBX11210



Supplied with 2 keys profile n° 455

● Red	NC		EMERGENCY STOP	LBX11210
● Red	NC + NO		EMERGENCY STOP	LBX130071
● Red	2 NC		EMERGENCY STOP	LBX130072


For contact blocks attached to operator please contact us.

MUSHROOM HEAD ø 40 EN 418 / ISO 13850




Push-turn to reset






LBX17301



Compliant with the requirements of emergency stop:
EN 418 / ISO 13850

● Red	NC		EMERGENCY STOP	LBX17301
● Red	NC + NO		EMERGENCY STOP	LBX17311
● Red	2 NC		EMERGENCY STOP	LBX17302

WITH EN13850 SYMBOL ON BUTTON HEAD

● Red	NC		EMERGENCY STOP	LBX130065
● Red	NC + NO		EMERGENCY STOP	LBX130057
● Red	2 NC		EMERGENCY STOP	LBX130066

WITH EMO TEXT ON BUTTON HEAD (WITHOUT EMERGENCY STOP ON ENCLOSURE)

● Red	NC		LBX130067
● Red	NC + NO		LBX130068
● Red	2 NC		LBX130069

For contact blocks attached to operator please contact us.



LBX130057



LBX130069

Technical Specifications

► GENERAL

Characteristics	Data	Standards
► Storage temperature	- 40 °C to + 70 °C	
► Operating temperature	- 25 °C to + 70 °C	
► Climatic resistance	Constant humid heat Cyclic damp heat Resistance to sea air	IEC 60068-2-3 IEC 60068-2-30 IEC 60068-2-52
► Degree of protection	IP 66 for standard heads IP 67 for shrouded heads IP 66 for equipped control stations IP 20 at the rear of the panel for contact blocks and one piece pilot lights Type 1, 2, 3, 3R, 3S, 4, 4X, 12, and 13 for heads and control stations	IEC 60529 NEMA standard
► Protection against mechanical impacts	IK 05 illuminated and non-illuminated heads IK 07 empty control station	IEC 62262
► Electrical insulation	Class II - heads and control station	IEC 60947-5-1
► Terminal marking		IEC 60947-1
► Tightening torques	Locking ring: recommended 3 N.m terminals: max. 1.2 N.m	
► Approvals	UL United states and Canada BV Bureau Véritas Certification OC/CB	UL 508, CSA 22.2 Marine rules IEC 60947-5-1 IEC 60947-5-5 IEC 60947-5-4
► Vibrations	withstand vibration Fc test: 2 to 25 Hz, 1.6 mm; 25-100 Hz, 4 g	IEC 60068-2-6

Technical Specifications

► HEADS

Characteristics	Data	Standards
► Mechanical endurance	Spring return: 5,000,000 Push-push: 500,000 Selector switches: 300,000 Mushroom head maintained function EN 418: 10,000 Mushroom head maintained function: 150,000	
► Activation force in N	Spring return + NO: 6.5 Spring return + NC: 4.5 Additional NO contact: 4.5 Additional NC contact: 3.0 Push-pull mushroom head + NO + NC: 27 Push-turn mushroom head + NO + NC: 22 Push-pull mushroom head EN 418 + NO + NC: 37 Push-turn mushroom head EN 418 + NO + NC: 60	
► Activation force in Nm	Selector switch + NO: 0.04 Additional NO contact: 0.03	

► EMERGENCY STOP ACTUATORS - EN 418/ISO 13850:

According to IEC/EN60947-5-5, the emergency stop function can be provided by an EN418/ISO13850 mushroom head combined with a "positive opening" NC contact block.

The mechanism of our EN418/ISO13850 mushroom heads is so designed that a "push" action of sufficient force to open the contact systematically triggers an irreversible locking of this opening. This generates an "emergency stop" signal which can be cancelled only by deliberate manual resetting of the mushroom head (pull and turn or unlocking by key).

This function allows to generate an "emergency stop" signal for any equipment subject to directive 98/37CE (machinery safety) completed by the IEC 60204-1 standard.

The EN418/ISO13850 mushroom heads also comply with the safety requirements detailed in standards EN418 and ISO13850.

Technical Specifications

► CONTACT BLOCKS

Screw and plug-in connection characteristics	Data		Standards																																										
▶ Rated insulation voltage	690 V AC 600 V AC		IEC/EN 60947-1 UL 508																																										
▶ NC contacts	Positive opening		IEC/EN 60947-5-1																																										
▶ Rated impulse voltage U _{imp} Pollution degree	6kV 3																																												
▶ Conventional thermal current in free air conditions	AC15: 10 A DC13: 2.5 A		IEC 60947-5-1																																										
▶ Electrical ratings	<div><div>Alternating current AC15 - A 600 U_e = 120 V, I_e = 6 A U_e = 240 V, I_e = 3 A U_e = 380 V, I_e = 1.9 A U_e = 480 V, I_e = 1.5 A U_e = 500 V, I_e = 1.4 A U_e = 600 V, I_e = 1.2 A Minimum operating current - standard blocks U_e = 24 V DC and I_e = 5 mA Failure rate < 10⁻⁸ UL508 Alternating Current 50/60Hz - A600 Continuous Current - 10 amps Rated Voltage - 600Vac</div><div>Direct current DC13 - Q 600 U_e = 125 V, I_e = 0.55 A U_e = 250 V, I_e = 0.27 A U_e = 400 V, I_e = 0.15 A U_e = 500 V, I_e = 0.13 A U_e = 600 V, I_e = 0.1 A - gold plated contacts U_e = 5 V DC and I_e = 1 mA Failure rate < 10⁻⁸</div></div> <table><tr><th></th><th>Max. Amps Make</th><th>Max. Amps Break</th><th></th><th>Max. Amps Make</th><th>Max. Amps Break</th></tr><tr><td>Voltage</td><td></td><td></td><td>Voltage</td><td></td><td></td></tr><tr><td>72</td><td>60</td><td>10</td><td>24</td><td>2.5</td><td>2.5</td></tr><tr><td>120</td><td>60</td><td>6.0</td><td>125</td><td>0.55</td><td>0.55</td></tr><tr><td>240</td><td>30</td><td>3.0</td><td>250</td><td>0.27</td><td>0.27</td></tr><tr><td>480</td><td>15</td><td>1.5</td><td>301-600</td><td>0.10</td><td>0.10</td></tr><tr><td>600</td><td>12</td><td>1.2</td><td></td><td></td><td></td></tr></table>			Max. Amps Make	Max. Amps Break		Max. Amps Make	Max. Amps Break	Voltage			Voltage			72	60	10	24	2.5	2.5	120	60	6.0	125	0.55	0.55	240	30	3.0	250	0.27	0.27	480	15	1.5	301-600	0.10	0.10	600	12	1.2				IEC 60947-5-1
	Max. Amps Make	Max. Amps Break		Max. Amps Make	Max. Amps Break																																								
Voltage			Voltage																																										
72	60	10	24	2.5	2.5																																								
120	60	6.0	125	0.55	0.55																																								
240	30	3.0	250	0.27	0.27																																								
480	15	1.5	301-600	0.10	0.10																																								
600	12	1.2																																											
▶ Electrical operating life	<div><div>1 million cycles for: - AC15 - B 300 U_e = 120 V, I_e = 3 A U_e = 240 V, I_e = 1.5 A</div><div>- DC13 - R 300 U_e = 125 V, I_e = 0.22 A U_e = 250 V, I_e = 0.1 A</div></div>																																												
▶ Applicable wire sizes	Rigid or flexible wire without ferrule: 0.5 mm ² to 2 x 2.5 mm ² Rigid or flexible wire with ferrule: 0.5 mm ² to 2 x 1.5 mm ²																																												

Technical Specifications

► CONTACT BLOCKS

Faston connection	Data		Standards																														
▶ Rated insulation voltage	320 V AC 300 V AC		IEC/EN60947-1 UL 508																														
▶ NC contacts	Positive opening		IEC/EN 60947-5-1																														
▶ Rated impulse withstanding voltage Uimp Pollution degree	6 kV 3																																
▶ Conventional thermal current in free air conditions	AC 15: 10 A DC 13: 2.5 A		IEC 60947-5-1																														
▶ Electrical ratings	<div><div>Alternating current AC15 - A 300 Ue = 120 V, Ie = 6 A Ue = 240 V, Ie = 3 A Minimum current of use Ue = 24 V DC and Ie = 5 mA Failure rate < 10⁻⁸ UL508 Alternating Current 50/60Hz - A300 Continuous Current - 10 amps Rated Voltage - 300Vac</div><div>Direct current DC13 - Q 300 Ue = 125 V, Ie = 0.55 A Ue = 250 V, Ie = 0.27 A Direct Current - Q300 Continuous Current - 2.5 amps Rated Voltage - 300Vdc</div></div> <table><tr><td></td><td>Max. Amps</td><td>Max. Amps</td><td></td><td>Max. Amps</td><td>Max. Amps</td></tr><tr><td>Voltage</td><td>Make</td><td>Break</td><td>Voltage</td><td>Make</td><td>Break</td></tr><tr><td>72</td><td>60</td><td>10</td><td>24</td><td>2.5</td><td>2.5</td></tr><tr><td>120</td><td>60</td><td>6.0</td><td>125</td><td>0.55</td><td>0.55</td></tr><tr><td>240</td><td>30</td><td>3.0</td><td>250</td><td>0.27</td><td>0.27</td></tr></table>			Max. Amps	Max. Amps		Max. Amps	Max. Amps	Voltage	Make	Break	Voltage	Make	Break	72	60	10	24	2.5	2.5	120	60	6.0	125	0.55	0.55	240	30	3.0	250	0.27	0.27	IEC 60947-5-1
	Max. Amps	Max. Amps		Max. Amps	Max. Amps																												
Voltage	Make	Break	Voltage	Make	Break																												
72	60	10	24	2.5	2.5																												
120	60	6.0	125	0.55	0.55																												
240	30	3.0	250	0.27	0.27																												
▶ Electrical operating life	1 million cycles for: - AC15 - B 300 Ue = 120 V, Ie = 3 A Ue = 240 V, Ie = 1.5 A - DC13 - R 300 Ue = 125 V, Ie = 0.22 A Ue = 250 V, Ie = 0.1 A																																
▶ Faston size	6.35 mm (0.25") or 2 x 2.8 mm (0.110")																																

Technical Specifications

► CONTACT BLOCKS

Pin-style connection (for PCB)	Data		Standards																													
▶ Rated insulation voltage	250 V AC 250 V AC		IEC/EN60947-1 UL 508																													
▶ NC contacts	Positive opening		IEC/EN 60947-5-1																													
▶ Rated impulse withstanding voltage Uimp Pollution degree	4 kV 3																															
▶ Conventional thermal current in free air conditions	AC 15: 5 A DC 13: 1 A		IEC 60947-5-1																													
▶ Electrical ratings	Alternating current AC 15 - B 300 Ue = 120 V, Ie = 3 A Ue = 240 V, Ie = 1.5 A	Direct current DC13 - R 300 Ue = 125 V, Ie = 0.22 A Ue = 250 V, Ie = 0.1 A	IEC 60947-5-1 IEC 60947-5-4																													
	Minimum current of use - standard blocks Ue = 24 V DC and Ie = 5 mA Failure rate < 10 ⁻⁸	- golden contacts Ue = 5 V DC and Ie = 1 mA Failure rate < 10 ⁻⁸																														
	UL508																															
	Alternating Current 50/60Hz - B300 Continuous Current - 5 amps Rated Voltage - 300Vac	Direct Current - R300 Continuous Current - 1 amp Rated Voltage - 300Vdc																														
	<table><tr><td></td><td>Max. Amps</td><td>Max. Amps</td></tr><tr><td>Voltage</td><td>Make</td><td>Break</td></tr><tr><td>72</td><td>30</td><td>5.0</td></tr><tr><td>120</td><td>30</td><td>3.0</td></tr><tr><td>240</td><td>15</td><td>1.5</td></tr></table>		Max. Amps	Max. Amps	Voltage	Make	Break	72	30	5.0	120	30	3.0	240	15	1.5	<table><tr><td></td><td>Max. Amps</td><td>Max. Amps</td></tr><tr><td>Voltage</td><td>Make</td><td>Break</td></tr><tr><td>24</td><td>1.0</td><td>1.0</td></tr><tr><td>125</td><td>0.22</td><td>0.22</td></tr><tr><td>250</td><td>0.11</td><td>0.11</td></tr></table>			Max. Amps	Max. Amps	Voltage	Make	Break	24	1.0	1.0	125	0.22	0.22	250	0.11
	Max. Amps	Max. Amps																														
Voltage	Make	Break																														
72	30	5.0																														
120	30	3.0																														
240	15	1.5																														
	Max. Amps	Max. Amps																														
Voltage	Make	Break																														
24	1.0	1.0																														
125	0.22	0.22																														
250	0.11	0.11																														
▶ Electrical operating life	1 million cycles for: - AC15 - B 300 Ue = 120 V, Ie = 3 A Ue = 240 V, Ie = 1.5 A	- DC13 - R 300 Ue = 125 V, Ie = 0.22 A Ue = 250 V, Ie = 0.1 A																														
▶ Pin diameter	ø 1 mm																															

Technical Specifications

▶ LED BLOCKS FOR ILLUMINATED HEADS

Characteristics	Data	Standards
▶ Rated insulation voltage	300 V	IEC/EN 60947-5-1
▶ Rated impulse voltage Uimp Pollution degree	4 kV (with filter block see p. 70) 3	IEC/EN 60947-1
▶ Operating voltage	12 to 24 V AC/DC 48 V AC/DC (for LED block) 130 V AC 230 V AC	
▶ Frequency	50 or 60 Hz	
▶ Lifetime at rated supply voltage	Red and yellow: 100 000 hours at 25 °C Other colors: 50 000 hours at 25 °C	
▶ Consumption of LED blocks	Voltage: - 24 V: 25 mA ± 20% - 48 V: 15 mA ± 5% - 130 V: 20 mA ± 10% - 230 V: 16 mA ± 30%	


▶ ONE PIECE PILOT LIGHT BA9S

Characteristics	Data	
▶ Rated insulation voltage	400 V	IEC 60947-5-1
▶ Rated impulse withstand voltage Uimp	4 kV	IEC/EN 60947-1
▶ Bulb rating	400 V max. - 2.6 W max. 240 V max. - 2.6 W max.	IEC 60947-5-1 UL 508

Technical Specifications

PANEL CUT-OUT

DRILLING

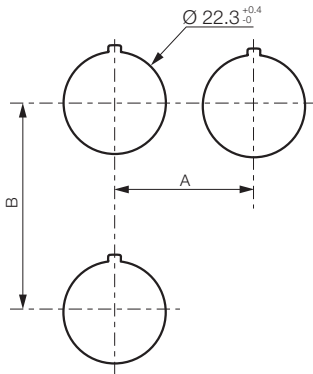


For heads equipped with electrical blocks with screw or plug-in terminals


Minimum interval (mm)

	= 30	With or without legend (usual case)
	= 33	IP 67 (silicon shroud)
	= 40	With large legend plate
A	> 40	For mushroom head $\varnothing 40$
	> 45	For selector switch with long handle
	= 38	For super-flush button
	= 50	With 5 position clip
B	= 45	With or without legend plate (usual case)
	= 54	With double touch
	= 77	With double touch + legend plate
	= 50	Joystick

DRILLING FOR SUPER-FLUSH BUTTON




DRILLING WHEN USING THE ANTI-ROTATION RING (OPTIONAL)




THICKNESS OF PANEL (E)

E = 1 to 6 mm




Technical Specifications

NON-ILLUMINATED

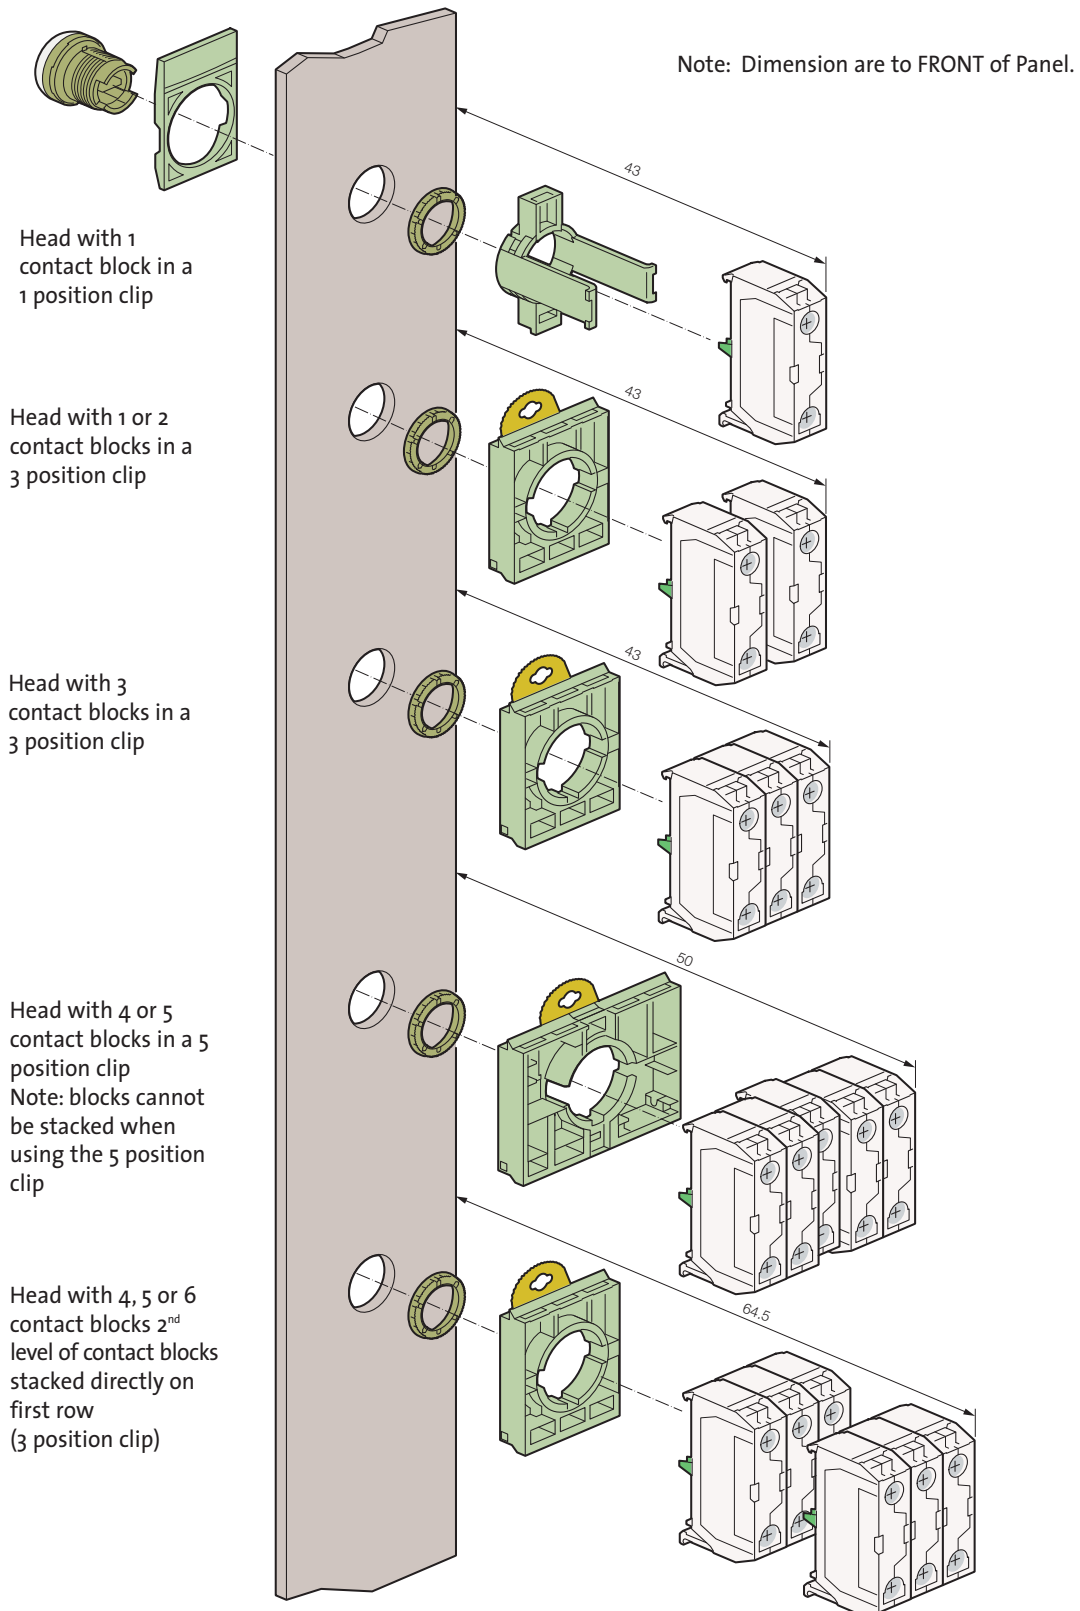

Technical Specifications

ILLUMINATED

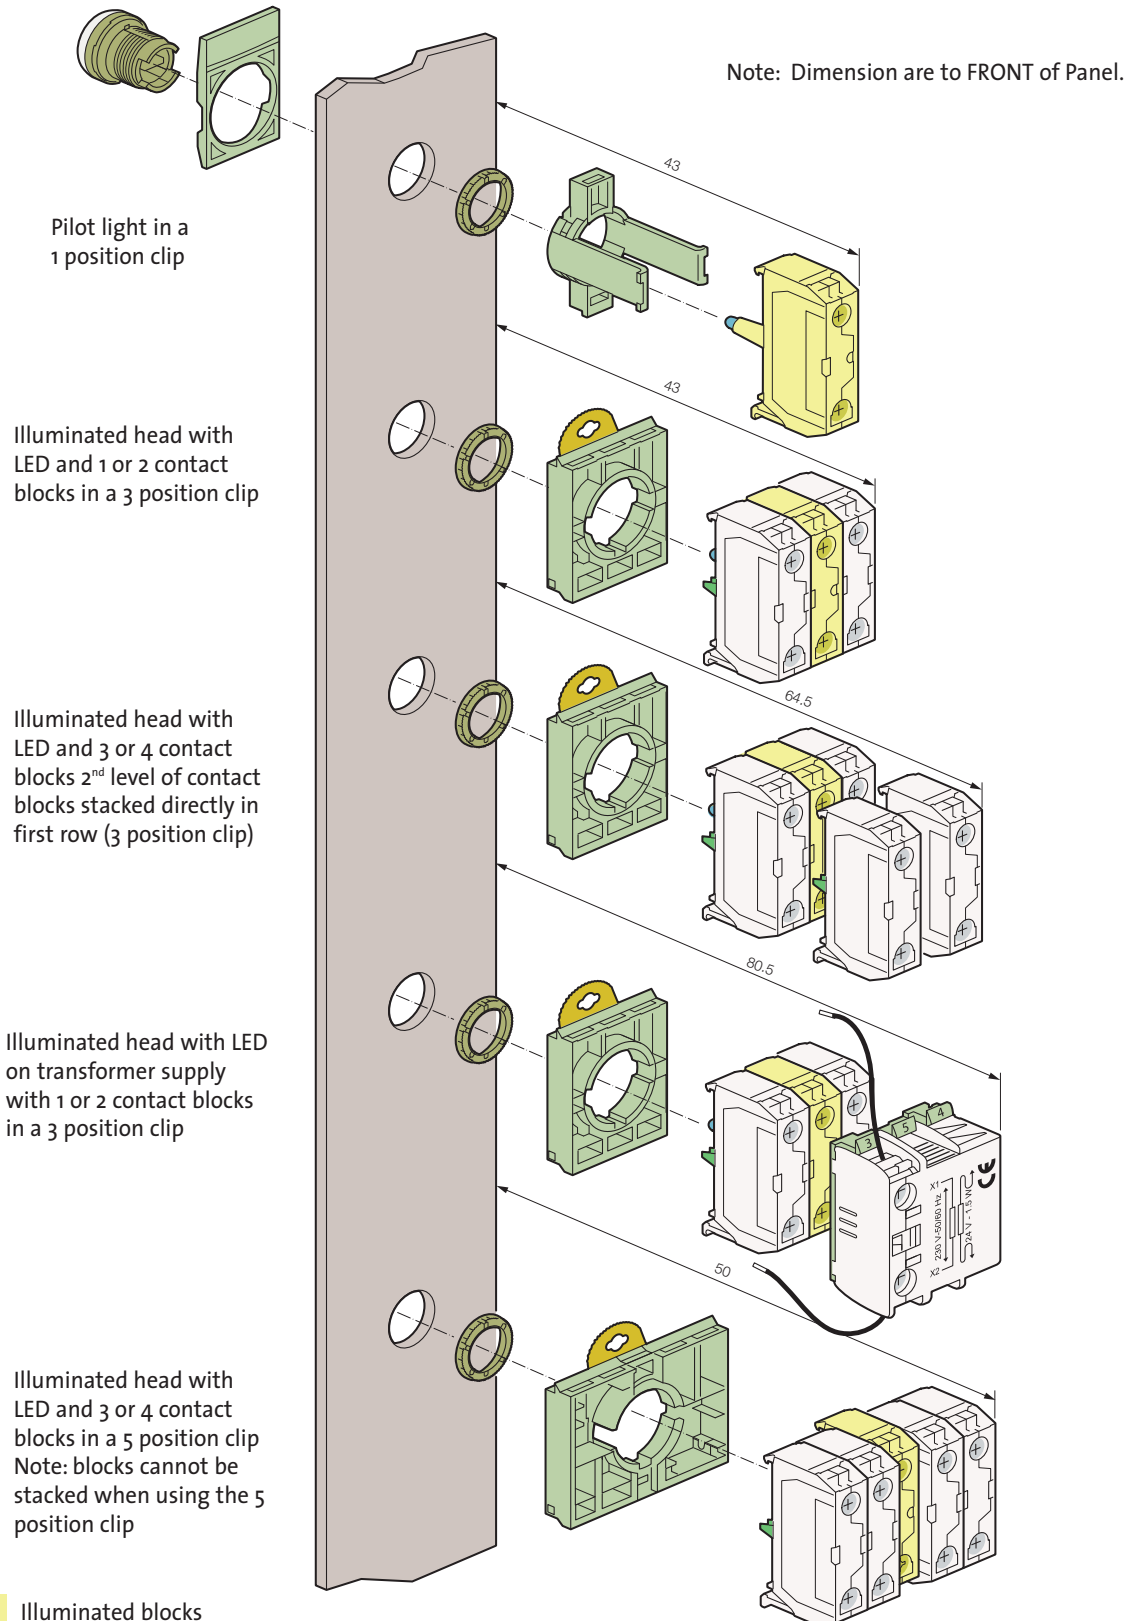


Technical Specifications


MECHANICAL OPERATION

For 3 position selector switches

Handle position
(view from front of panel)



Contacts block actuation
(clip position)



Non operated block



Operated block




MECHANICAL OPERATION

For twin/triple touch switches

Operator View
(highlighted button is depressed)



Contacts block actuation
(clip position)



Non operated block



Operated block



MECHANICAL OPERATION

For Joysticks

2 position

TWO BLOCK CLIP (LME3 - STANDARD WITH JOYSTICK HEAD)					
LM11 in Clip Location	Terminal Numbers	Position			
		A	O	B	
1	3-4	X	O	O	
	1-2	O	O	X	
2	3-4	O	O	X	
	1-2	X	O	O	

4 position

TWO BLOCK CLIP (LME3 - STANDARD WITH JOYSTICK HEAD)						
LM11 in Clip Location	Terminal Numbers	Position				
		A	B	O	C	D
1	3-4	O	O	O	O	X
	1-2	O	O	O	X	O
2	3-4	O	X	O	O	O
	1-2	X	O	O	O	O

FOUR BLOCK CLIP (LME5)				
LM11 in Clip Location	Terminal Numbers	Position		
		A	O	B
1	3-4	X	O	O
	1-2	O	O	X
2	3-4	O	O	X
	1-2	X	O	O
3	3-4	X	O	O
	1-2	O	O	X
4	3-4	O	O	X
	1-2	X	O	O


FOUR BLOCK CLIP (LME5)					
LM11 in Clip Location	Terminal Numbers	Position			
		A	B	O	C
1	3-4	O	O	O	O
	1-2	O	O	O	X
2	3-4	O	X	O	O
	1-2	X	O	O	O
3	3-4	O	O	O	O
	1-2	O	O	O	X
4	3-4	O	X	O	O
	1-2	X	O	O	O

Technical Specifications


► DIAGRAMS

PUSH-TO-TEST LED PILOT LIGHT DIAGRAMS


Lamp-testing module with
1 diode (33ET) for direct
supply 24 V and 48 V

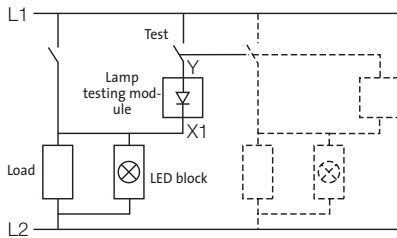


Lamp-testing module with
2 diodes (33ETT) for direct
supply 24 V and 48 V

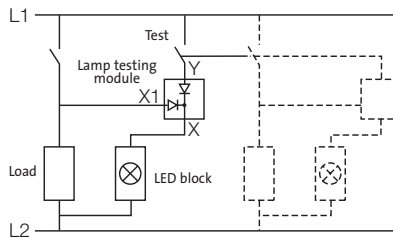


Lamp-testing assembly
for direct supply 130 V and 240 V

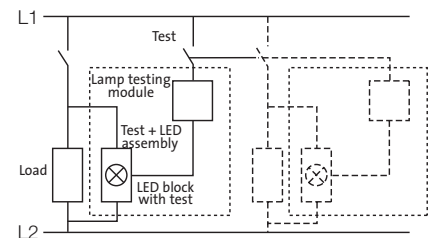

PRINTED CIRCUIT BOARD MOUNTING

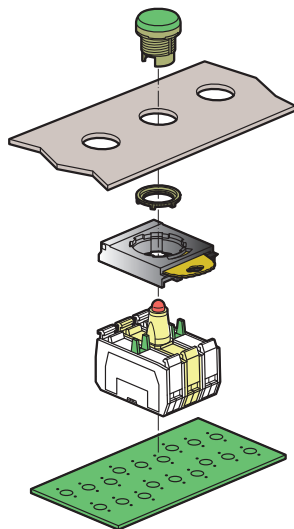

PCB BOARD DRILL PLAN

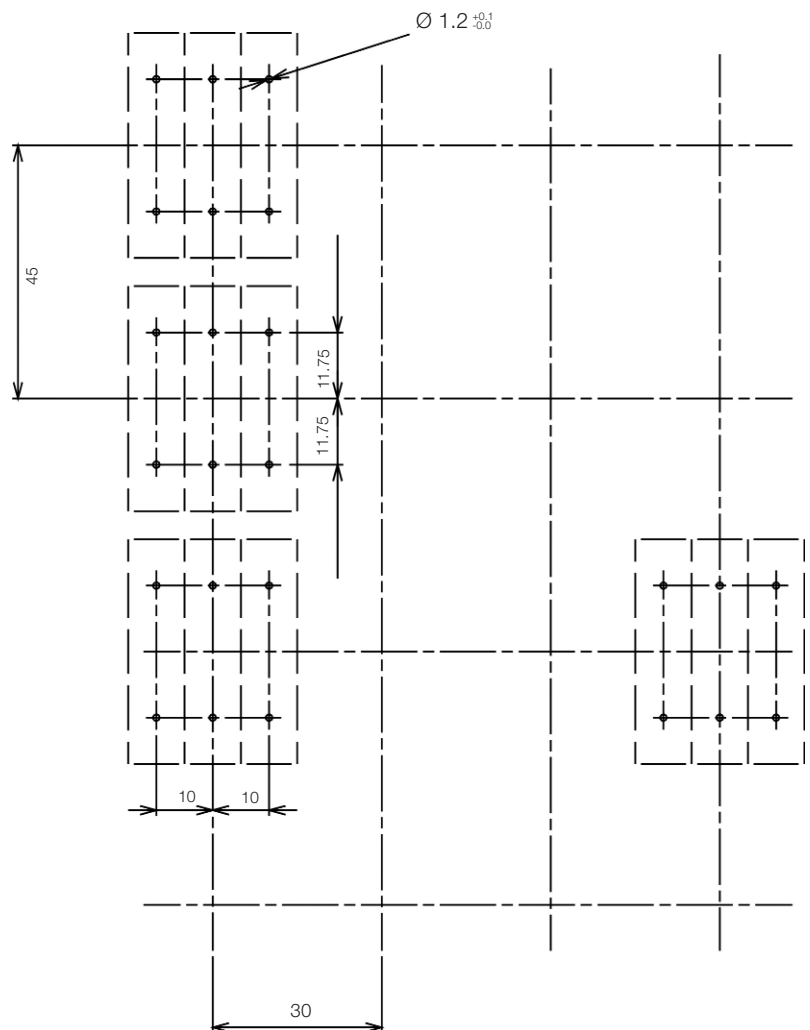

PCB TERMINAL - SINGLE CLIP

PCB TERMINAL - 3 POSITION CLIP

