


# Product data sheet

Specifications

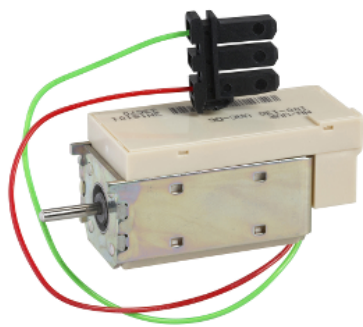

Standard opening voltage release  
MX, MasterPact NT, ComPacT  
NS630b/NS1600, drawout,  
24/30VDC, 24VAC

33810

## Main

Range	MasterPact
Range of product	MasterPact NT ComPacT NS630b...1600 new generation
Device short name	MX
Product or component type	Voltage release
Device application	Control
Voltage release type	Opening coil Instantaneous voltage release
Control type	Standard
[Uc] control circuit voltage	24 V AC 50/60 Hz 24...30 V DC
Circuit breaker mounting mode	Drawout
Range compatibility	MasterPact NT ComPact NS630b...1600

## Complementary

Operating threshold	0.7...1.1 x Un opening
Response time	50 ms +/- 10 % for MasterPact NT 50 ms +/- 10 % for Compact NS630b...1600
Supply holding power	4.5 VA

## Packing Units

Unit Type of Package 1	PCE
Package 1 Length	8.3 cm
Number of Units in Package 1	1
Package 1 Width	6.1 cm
Package 1 Height	3.4 cm
Package 1 Weight	2.023 kg

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

### Contractual warranty

Warranty	18 months
----------	-----------