


Product data sheet

Specifications

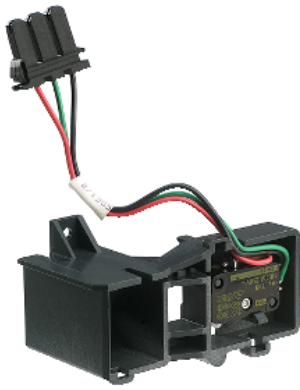

auxiliary contact SDE - 6 A - 1 NO/ NC - for Masterpact NW

47915

Main

Device short name	SDE
Product or component type	Auxiliary contact
Device application	Connection
Range compatibility	MasterPact NW circuit breaker
Signal contacts composition	1 NO/NC

Complementary

Auxiliary contacts type	Standard
[I _{th}] conventional free air thermal current	6 A
[I _e] rated operational current	AC-12: 3 A at 690 V AC 50/60 Hz DC-12: 3 A at 24/48 V DC AC-12: 5 A at 240/380 V AC 50/60 Hz AC-12: 5 A at 480 V AC 50/60 Hz DC-12: 0.15 A at 250 V DC DC-12: 0.3 A at 125 V DC
Minimum load	100 mA at 24 V
Accessory / separate part category	Spare parts for MasterPact NW

Packing Units

Unit Type of Package 1	PCE
Package 1 Length	16.0 cm
Number of Units in Package 1	1
Package 3 Width	17.7 cm
Package 3 Weight	260.0 g
Package 2 Width	30.0 cm
Package 2 Height	30.0 cm
Package 2 Weight	2.52 kg
Number of Units in Package 3	4
Unit Type of Package 3	BB1
Package 3 Height	6.0 cm
Package 3 Length	27.0 cm

Package 1 Width	12.0 cm
Package 1 Height	5.0 cm
Package 1 Weight	48.0 g
Number of Units in Package 2	32
Unit Type of Package 2	S03
Package 2 Length	40.0 cm

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)

Contractual warranty

Warranty	18 months
----------	-----------