


Product data sheet

Specifications

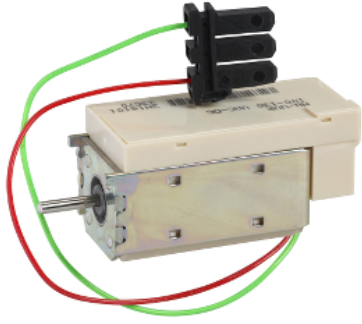

Standard closing voltage release XF, MasterPact NW drawout, 24/30VDC, 24VAC

48481

Main

Range	MasterPact
Range of product	MasterPact NW MasterPact NW DC
Device short name	XF
Product or component type	Voltage release
Device application	Control
Voltage release type	Closing coil Instantaneous voltage release
Control type	Standard
[Uc] control circuit voltage	24 V AC 50/60 Hz 24...30 V DC
Circuit breaker mounting mode	Drawout
Range compatibility	MasterPact NW MasterPact NW DC

Complementary

Operating threshold	0.85...1.1 Un closing
Response time	70 ms +/- 10 % for MasterPact NW 800 A 70 ms +/- 10 % for MasterPact NW 1000 A 70 ms +/- 10 % for MasterPact NW 1250 A 70 ms +/- 10 % for MasterPact NW 1600 A 70 ms +/- 10 % for MasterPact NW 2000 A 70 ms +/- 10 % for MasterPact NW 2500 A 70 ms +/- 10 % for MasterPact NW 3200 A 70 ms +/- 10 % for MasterPact NW 4000 A 80 ms +/- 10 % for MasterPact NW 5000 A 80 ms +/- 10 % for MasterPact NW 6300 A
Supply holding power	4.5 VA

Packing Units

Unit Type of Package 1	PCE
Package 1 Length	8.3 cm
Number of Units in Package 1	1
Package 1 Width	6.1 cm
Package 1 Height	3.4 cm
Package 1 Weight	1.166 kg

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information

Contractual warranty

Warranty	18 months
----------	-----------
