


Product data sheet

Specifications

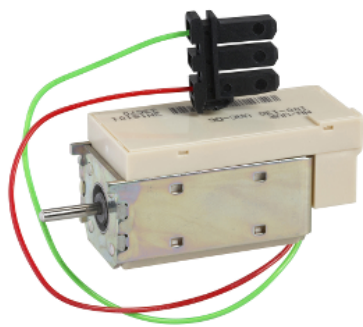

Standard opening undervoltage release MN, MasterPact NW drawout, 24/30VDC, 24VAC

48501

Main

Range	MasterPact
Range of product	MasterPact NW MasterPact NW DC MasterPact NW NAVY
Device short name	MN
Product or component type	Voltage release
Device application	Control
Voltage release type	Opening coil Undervoltage release
Control type	Standard
[Uc] control circuit voltage	24 V AC 50/60 Hz 24...30 V DC
Circuit breaker mounting mode	Drawout
Range compatibility	MasterPact NW MasterPact NW DC

Complementary

Operating threshold	0.35...0.7 x Un opening 0.85 Un closing
Response time	90 ms +/- 5 %
Supply holding power	4.5 VA

Packing Units

Unit Type of Package 1	PCE
Package 1 Length	8.2 cm
Number of Units in Package 1	1
Package 1 Width	6.0 cm
Package 1 Height	3.5 cm
Package 1 Weight	178.0 g

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration

Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------