


WIRING DUCT (SLOTTED)

MD-5L

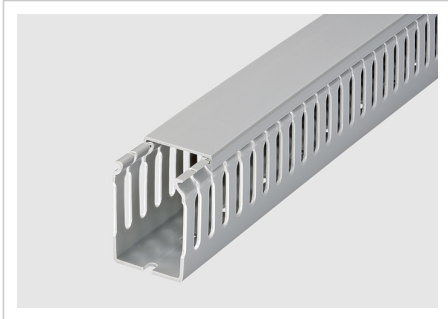


Description

Features

- Material: UL94V-0 and M1 flame rated, UL approved PVC.
- Color: Grey.
- PVC service temperature: 85°C
- UL Test up to 50°C
- These devices are for routing of wires within devices in factory installations.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request of reasonable quantity.
- ※ The standard wiring duct can be available for non-slip cover, suitable for vertical installations. The item number please specify for example, Item no. : MD-2→MQ-2, KD-5.5→KQ-5.5, HD-8→HQ-8
- Non-slip cover for the size less than 20mm width or bigger than 125mm is available upon request.
- ※ Item number with suffix-V for upper score line allows finger removal without tool during the installation when a greater opening is required. For example: MDV-2L

Dimensional Drawing

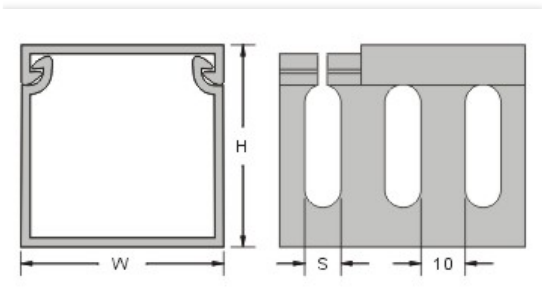

Certification



+ Base Data

Width (W)	45
Height (H)	65
Slot (S)	8
Length (L)	2M
Material	PVC
Color	Grey
With Adhesive	No
Certification	UL,CSA,CE,UKCA,VDE,UL94V-0,RoHS