


WIRING DUCT (SLOTTED)

VD-1

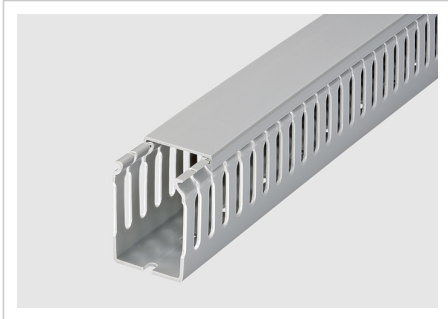


Description

Features

- Material: UL94V-0 and M1 flame rated, UL approved PVC.
 - Color: Grey.
 - PVC service temperature: 85°C
 - UL Test up to 50°C
 - These devices are for routing of wires within devices in factory installations.
 - Features parallel holes on both sidewalls to facilitate cutting in wire application.
 - Special color, size, length upon request of reasonable quantity.
- ※The standard wiring duct can be available for non-slip cover, suitable for vertical installations. The item number please specify for example, Item no. :VD-8→VQ-8, KVD-8→KVQ-8, HVD-8→HVQ-8
Non-slip cover for the size less than 20mm width or bigger than 125mm is available upon request.

Dimensional Drawing

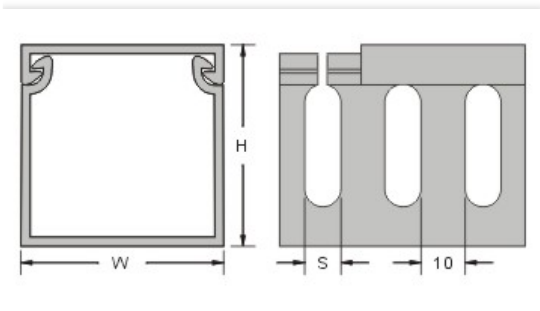

Certification



+ Base Data

Width (W)	25
Height (H)	30

Slot (S)	8
Length (L)	2M
Material	PVC
Color	Grey
With Adhesive	No
Certification	UL,CSA,CE,UKCA,VDE,UL94V-0,RoHS