


Description




- Passive infrared presence detector for wall mounting
- Detection area 180° (up to 100 m²)
- Automatic presence- and brightness-dependent control for lighting and HVAC
- Mixed light measurement suitable for fluorescent lamps (FL/PL/ESL), halogen/incandescent lamps and LEDs
- 2 independent constant light controllers #3050 for controlling two light groups
 - Switching or constant light control with standby function
 - Fully or semi-automatic function mode
- 3 x occupancy controller #3071
 - for controlling the constant light controller or use as presence channels
- Light sensor #1010
- Occupancy sensor #1060
- Plug-in for convenient adjustment of parameters and functionality
- Brightness set point value can be set via network variables
- Scene Panel #3250 can be used with the theSenda S user remote control
- Integrated scene module (Scene controller #3251)
- Parallel switching of multiple presence detectors without logic modules
- Adjustable sensitivity
- Can be configured remotely
- SendoPro management remote control (optional)
- theSenda S user remote control (optional)
- LONMARK certified


Technical data

Topology	LON FTT
Operating voltage	24 V AC/DC AC +10%/-20% DC ±20%
Installation height	1,7 – 2,2 m
Minimum height	1,7 m
Installation type	Flush/surface wall mounting
Power consumption	~30 mA
Light measurement	Mixed light measurement
Setting range brightness	5 – 2000 lx
Switch-off delay	10 s – 100 min
Lamps	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs
Switch-on delay presence	10 s – 30 min / inactive
Type of connection	Spring terminals WAGO 243
Ambient temperature	-10 °C ... +50 °C
Type of protection	IP 40 (when fitted)
Conformity to type CE 	This device complies with the protection regulations of the EMC directives 2014/30/EU and of the Low Voltage directive 2014/35/EU.

Description

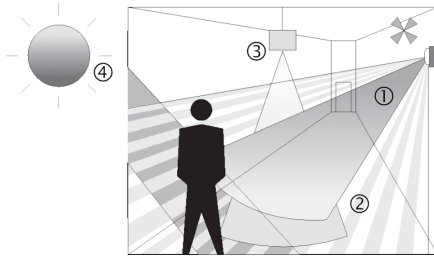

- 1 Mixed light measurement
- 2 Presence detection
- 3 Artificial light
- 4 Incident daylight

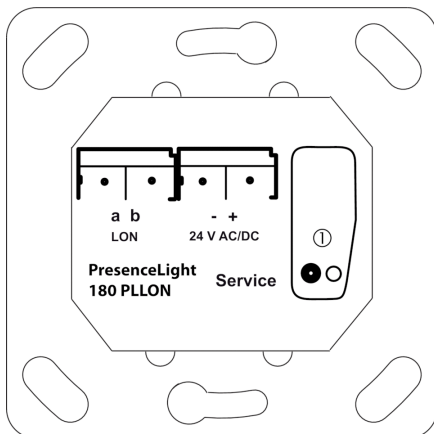

Settings on PresenceLight 180 PLLON

- 1 Service: Service key for identification of the Neuron ID.

The PresenceLight PLLON presence detector uses the following standardised LONMARK function profile. The function of the presence detector is dependent on the connections of the function profile and its parameters.

Light sensor (LONMARK profile 1010)

The light sensor sends the current brightness value in Lux at the place where the detector was installed over the Lonworks network, either cyclically or in case of sufficiently large changes. The measured brightness value can be adapted to the current situation in the room with a calibration (room correction factor).

Occupancy sensor (LONMARK profile 1060)

If the presence detector detects a movement, the output of the occupancy sensor will be set to the state OCCUPIED. This presence signal is used, for example, by an occupancy controller for presence-dependent control.

Occupancy controller (3 x LONMARK profile 3071)

There are 3 occupancy controller-type function profiles available for presence-dependent control of light channels or other controllers. The three outputs can be used universally. For example, one can be used to control both light outputs, a second controls the wall panel light group depending on the brightness level, while a third is used for presence-dependent HVAC control. The presence test mode is also part of the occupancy controller.

Constant light controller (2 x LONMARK profile 3050)

There are 2 function profiles of the constant light controller type available. Each of the two constant light controllers optionally supports the daylight-dependent switching function or constant light control. Both controllers can be used independently of one another. The lighting can be manually switched or dimmed at any time via a push button. A short button press switches the light on or off, a longer button press dims the light down or up (with constant light control). Depending on which of the two network variables was used, different behaviour appears after the manual override:

- Manual dimming stops the constant light control.
- Constant light control remains active after manual dimming to new brightness set point value.

Remote control (2 x LONMARK function profile 3200)

2 function profiles for remote control are available, one for each button series on the user remote control theSenda S. Every function profile passes on the IR commands received from the user remote control theSenda S to the configured output variables for control of blinds, lights, etc. This allows either the light groups controlled by the presence detector itself to be manually switched and dimmed or external light groups or blinds to be operated

Scene panel (LONMARK function profile 3250)

The scene panel broadcasts the scene numbers which can be triggered via both scene buttons on the user's theSenda S remote control

Scene controller (LONMARK function profile 3251)

The scene controllers are controlled either from external scene buttons or by the user's theSenda S remote control via the scene panel of the presence detector. There are two scenes available per each scene output object.

Detection range

The recommended mounting height is 2.2 m.


Mounting the device in the height of the switches is not recommended (possible obstacles in the detection range and vandalism).

Seated persons are reliably detected within a range of 7 m x 3.5 m.

Walking persons are detected reliably in a range with radius of 8 m.

Due to the horizontal orientation the detection range is very large. The sensitivity decreases by increasing distance.

Mounting height (A)	Sitting (S)	Walking (T)
2,2 m	25 m ² 7 m x 3,5 m	100 m ² 8 m

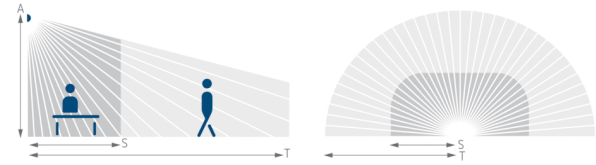


Brightness Measurement

The presence detector measures artificial and natural light, which is reflected below the detector. The installation site is a reference point for the lighting level. Brightness measurement can be adapted to the conditions in a room with the room correction factor. Direct light influences the light measurement. Direct artificial light towards the detector is to be avoided.

Suitable lamps

The presence detector is designed for the operation for fluorescent lamps, compact fluorescent lamps, halogen/incandescent lamps and LEDs.

Scale drawings

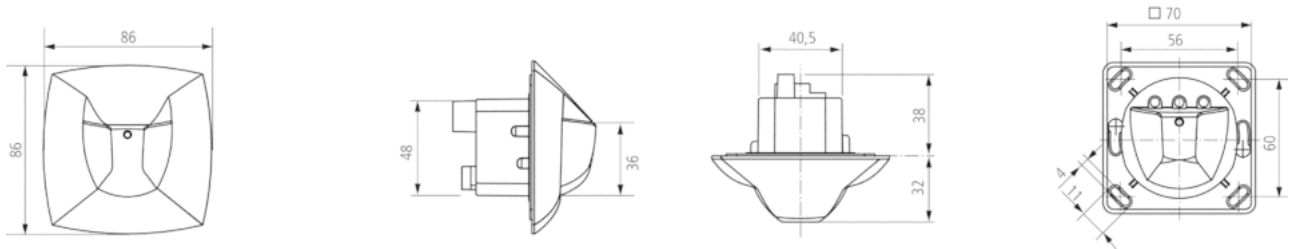

Accessories

Surface frame PresenceLight 40WH

- Article number: 9070606
[Details ▶ www.theben.de](http://www.theben.de)



Surface frame PresenceLight

- Article number: 9070513
[Details ▶ www.theben.de](http://www.theben.de)



SendoPro 868-A

- Article number: 9070675
[Details ▶ www.theben.de](http://www.theben.de)



theSenda S

- Article number: 9070911
[Details ▶ www.theben.de](http://www.theben.de)



QuickSafe

- Article number: 9070531
[Details ▶ www.theben.de](http://www.theben.de)



Article number: 2009150

Product selection

Installation type	Channel	Operating voltage	Colour	Type	Article number
Wall installation	2 x Light 3 x Occupancy	24 V AC/DC LON FTT	Pure white (similar to RAL 9010)	PresenceLight 180 PLLON WH	2009150
Wall installation	2 x Light 3 x Occupancy	24 V AC/DC LON FTT	Black (similar to RAL 9005)	PresenceLight 180 PLLON BK	2009151
Wall installation	2 x Light 3 x Occupancy	24 V AC/DC LON FTT	Silver (similar to RAL 9006)	PresenceLight 180 PLLON SR	2009152