




RET9 LINE

three-phase reactors



RET9
LINE

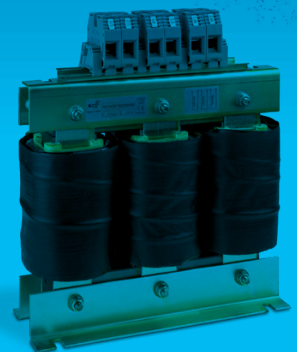

RET9
HCF

**PROTECTING
THE WORLD**





RET9
LINE

MAX WORKING VOLTAGE
690V

CURRENT
10A...200A

VOLTAGE DROP
4%^{400V}

STANDARDS
IEC/EN 61558-2-20
IEC/EN60076-6



RET9 LINE Three-phase reactors

RET9 three-phase reactors are specially designed to be installed in the supply line of motor drives, power converters or similar devices, where they are intended to:

- Protect the converter against notches and network spikes
- Reduction of interferences between converters
- Limitation of inrush currents
- Reduction of harmonics

These reactors are calculated with a voltage drop of 4% (400V), but they can work up to 690V.

Manufactured with low loss magnetic steel and copper windings, providing low watts loss and good efficiency.


They are impregnated with high solid content varnish that provide a good protection and avoid vibrations.

On request we can design and manufacture reactors with other characteristics, for other applications, with thermal switch, etc.

Range

CURRENT (A)	L (mH)	REFERENCE
10	2,928	9010100290
16	1,830	9016100180
20	1,464	9020100140
25	1,171	9025100110
32	0,915	9032291500
40	0,732	9040273200
50	0,586	9050258600
63	0,465	9063246500
80	0,366	9080236600
100	0,293	9100229300
125	0,234	9125223400
160	0,183	9160218300
200	0,146	9200214600

OTHER CHARACTERISTICS ON REQUEST SUBJECT TO AVAILABILITY AND POSSIBILITY

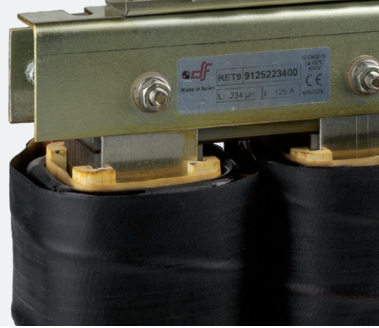

Technical data

Maximum working voltage	690V
Voltage drop	4% (400V)
Protection against electric shock	Class I
Thermal class	B (130°C) H (180°C)
Rated ambient temperature	40°C
Protection index	IP00
Frequency	50Hz
Inductance tolerance	8%
Maximum permanent overload	1,17·I _N
Dielectric strength	≥ 4kV
Ambient temperature of service *	-25°C ... 70°C
Storage temperature	-40°C ... 85°C
Cooling	Natural air cooling If the transformer is placed into a cabinet, it must have adequate ventilation

* For ambient temperatures higher than 40°C it is necessary to apply a derating.

Constructive characteristics

Core made with electrical steel with high permeability and low losses

Multiple air gap in order to obtain low losses and good behavior against the core saturation

Windings in copper F (155°C) or H (180°C) thermal class

Impregnation with varnish class H (180°C) with high solids content, in order to obtain low noise, good isolating properties and good protection against adverse ambient


Connection with terminal blocks

Standards


IEC/EN 61558-2-20
IEC/EN60076-6
RoHS Compliant



Dimensions

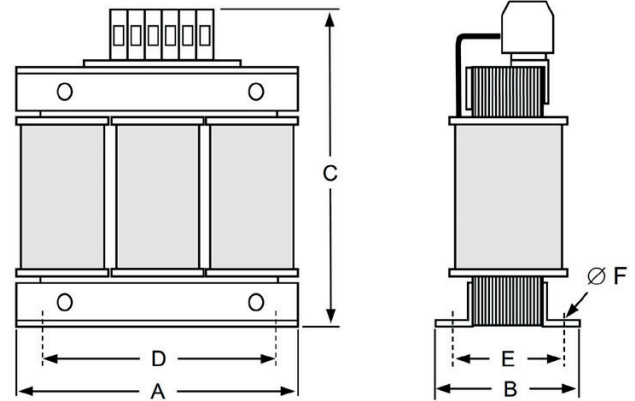

CURRENT (A)	DIMENSIONS (mm)						WEIGHT (kg)
	A	B	C	D	E	F	
8	120	82	125	80	62	5	2,3
10	120	82	125	80	62	5	2,5
16	180	70	200	140	60	7	5,5
20	180	70	200	140	60	7	5,6
25	180	70	200	140	60	7	5,7
32	180	70	215	140	60	7	5,8
40	180	80	215	140	70	7	8,6
50	180	80	215	140	70	7	4,8
63	180	90	222	140	80	7	10,5
80	240	95	275	200	80	7	12,6
100	240	95	275	200	80	7	12,8
125	240	95	275	200	80	7	13,1

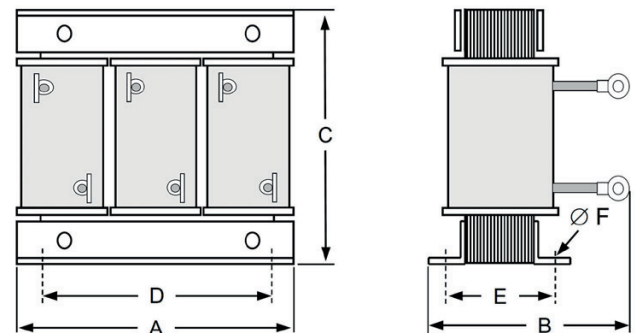

CURRENT (A)	DIMENSIONS (mm)						WEIGHT (kg)
	A	B	C	D	E	F	
160	240	175	210	200	90	7	17,9
200	240	200	210	200	115	7	26,9



HEAD OFFICE AND FACTORY

SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA
SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82


INTERNATIONAL SALES

Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES

Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

dfelectric.es

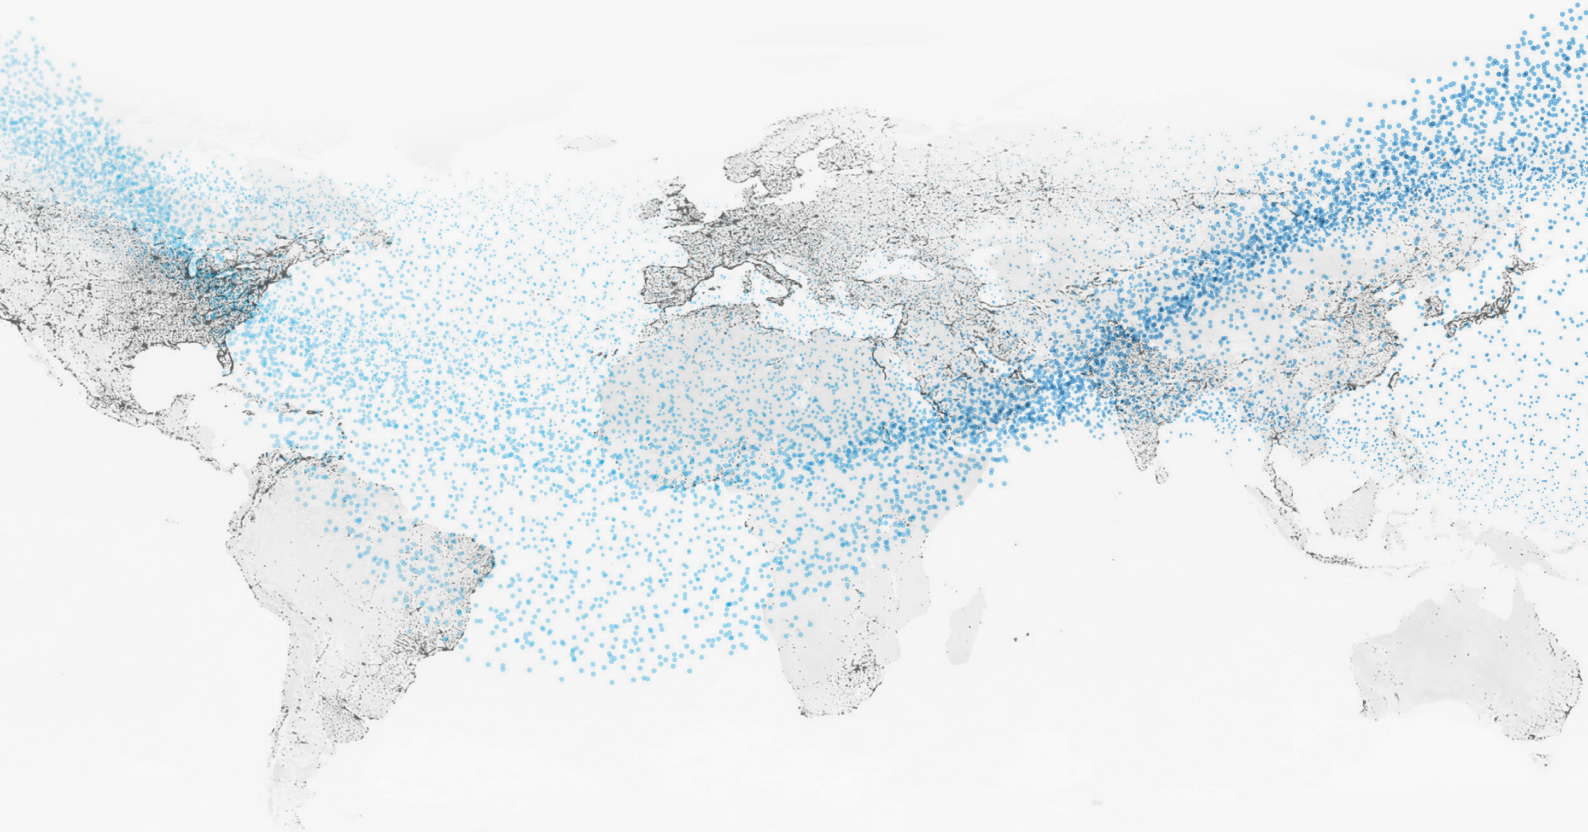

The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.



PROTECTING THE WORLD

