


1. Product overview

- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Very low contact resistance.
- Easy mounting and dismounting from the terminal rail.

2. Industrial Distribution Terminal Blocks - Screw type (Universal)

TUK-2.5JD

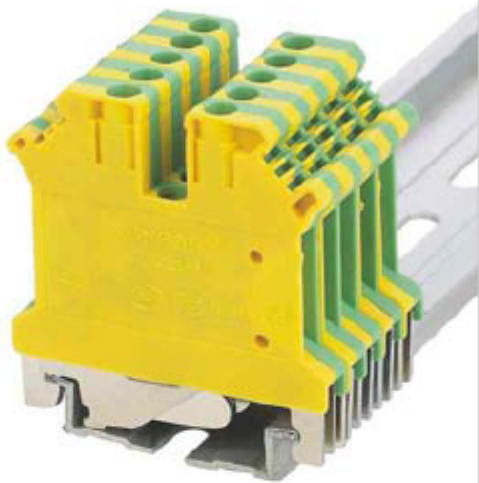

刚性导线(mm ²) Rigid cable	柔性导线(mm ²) Soft cable	AWG
0.2-4	0.2-2.5	24-12
IEC947-7-1	32A 800V	
EN50019*	28/32A 750V	
厚 / 宽 ↘ 高 / □高	Thickness/Width ↘ Height/ □Height	5.2/42.5/47/52
额定冲击电压 Insulating impulse voltage withstand		8KV
阻燃等级 Inflaming retarding grade		V0
扭紧力矩 Torque(lb-in)		0.6-0.8 (Nm)
螺丝 Clamping Screw(M)		M3
剥线长度 Insulation stripping leghth(mm)		8mm