




Features


The biggest advantage of FK66 series is easy to install, economic, and popular shape for customer to use. The filter mats are easily to change only need to snap out the cover.

Design


FK66 series comply with the colour RAL7032 and RAL7035. The range of filters are from 117mm to 323mm. The air flow is up to 560m³/h.

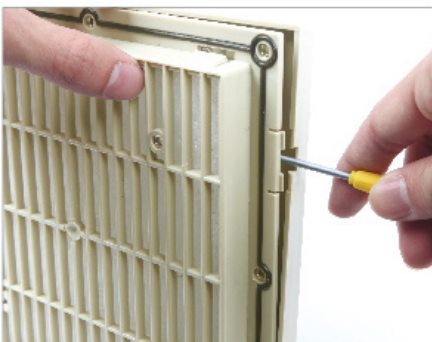

FK6621



Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP43

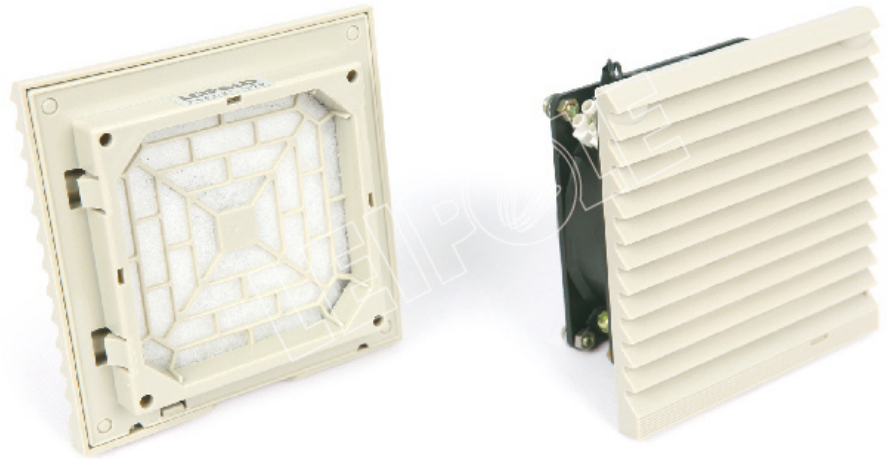

Available colors: RAL7035 RAL7032


Fans and filters FK 6621....	Fans and filters FK 6621.230	Exit filter FK 6621.300	Drawing FK 6621....

Technical data

Model	FK6621.230	FK6621.115	FK6621.024
Available colors	RAL7032/RAL7035	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2012.005/2012.036	2012.006/2012.037	2012.007/2012.038
Standard fan	F2E-92S-230	F2E-92S-115	SP-9225241HS
Rated voltage (V / Hz)	230/50/60	115/50/60	24(DC)
Air flow, free blowing	20/25m³/h		
Air flow With export filters	1xFK6621.300:15/18m³/h		
Axial Fan	Automatically shield pole motor		DC Motor
Rated current (A)	0.07/0.06	0.12/0.10	0.18
Power (W)	11/13	11/13	4.3
Noise level (dB)	36/38		
Operating temperature range	-10°C to +55°C		
Exit filter	FK6621.300 RAL7032(2012.008)/RAL7035(2012.039)		
Remarks	Special voltage needs can call the inquiry of the Company		


Performance

FK 6621....

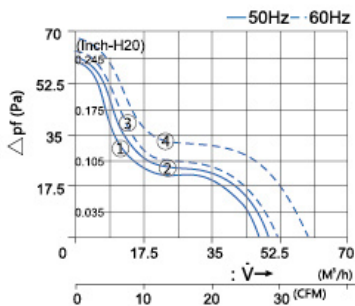

FK6622


Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP43



Available colors: RAL7035 RAL7032

Fans and filters FK 6622....	Fans and filters FK 6622.230	Exit filter FK 6622.300	Drawing FK 6622....


Performance FK 6622....

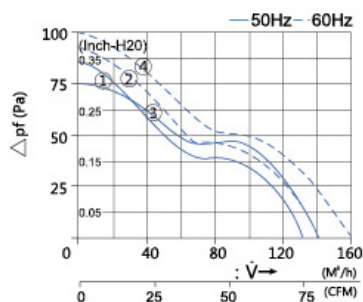


Technical data

Model	FK6622.230	FK6622.115	FK6622.024
Available colors	RAL7032/RAL7035	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2012.009/2012.040	2012.010/2012.041	2012.011/2012.042
Standard fan	F2E-120S-230	F2E-120S-115	SP1203824H
Rated voltage (V / Hz)	230/50/60	115/50/60	24(DC)
Air flow, free blowing	55/66m³/h		
Air flow With export filters	1xFK6622.300:43/50m³/h 2xFK6622.300:48/55m³/h		
Axial Fan	Automatically shield pole motor		DC Motor
Rated current (A)	0.12/0.10	0.24/0.23	0.30
Power (W)	19/14	18/15	3.5
Noise level (dB)	43/50		
Operating temperature range	-10°C to +55°C		
Exit filter	FK6622.300 RAL7032(2012.012)/RAL7035(2012.043)		
Remarks	Special voltage needs can call the inquiry of the Company		

FK6623







Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP43

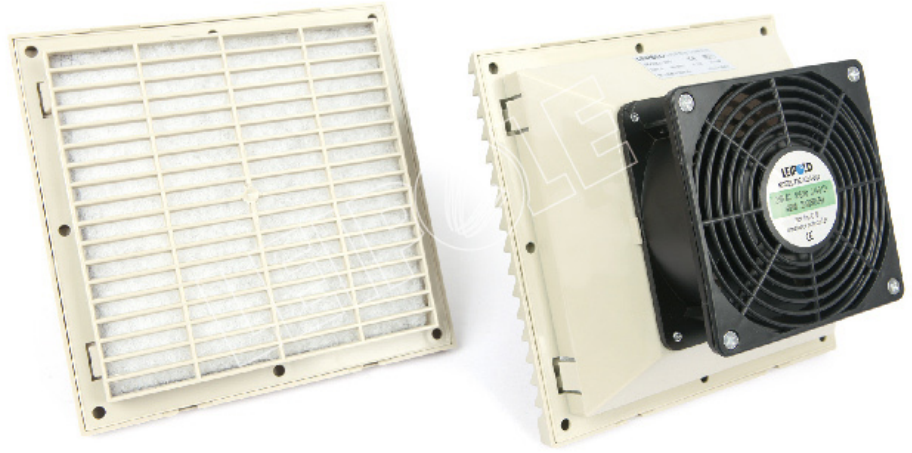

Available colors: RAL7035 RAL7032


Fans and filters FK 6623....	Fans and filters FK 6623.230	Exit filter FK 6623.300	Drawing FK 6623....
---------------------------------	---------------------------------	----------------------------	------------------------



Technical data


Model	FK6623.230	FK6623.115	FK6623.024
Available colors	RAL7032/RAL7035	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2012.013/2012.044	2012.014/2012.045	2012.015/2012.046
Standard fan	F2E-120S-230	F2E-120S-115	SP-1203824H
Rated voltage (V / Hz)	230/50/60	115/50/60	24(DC)
Air flow, free blowing	105/120m³/h		
Air flow With export filters	1xFK6623.300:71/82m³/h 2xFK6623.300:85/98m³/h		
Axial Fan	Automatically shield pole motor		DC Motor
Rated current (A)	0.12/0.10	0.24/0.23	0.30
Power (W)	19/14	18/15	3.5
Noise level (dB)	43/50		
Operating temperature range	-10°C to +55°C		
Exit filter	FK6623.300 RAL7032(2012.016)/RAL7035(2012.047)		
Remarks	Special voltage needs can call the inquiry of the Company		

Performance FK 6623....

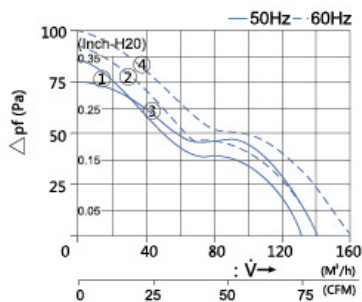

FK6625

Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP43



Available colors: RAL7035
RAL7032


Fans and filters FK 6625....	Fans and filters FK 6625.230	Exit filter FK 6625.300	Drawing FK 6625....

Technical data


Model	FK6625.230	FK6625.115	FK6625.024
Available colors	RAL7032/RAL7035	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2012.017/2012.048	2012.018/2012.049	2012.019/2012.050
Standard fan	F2E-162B-230	F2E-162B-115	FP-108CX-SI-BW
Rated voltage (V / Hz)	230/50/60	115/50/60	24(DC)
Air flow, free blowing	230/265m³/h		
Air flow With export filters	1xFK6625.300:170/205m³/h 2xFK6625.300:200/230m³/h		
Axial Fan	Automatically shield pole motor		DC Motor
Rated current (A)	0.26/0.20	0.51/0.42	0.46
Power (W)	37/33	40/35	14
Noise level (dB)	48/52		
Operating temperature range	-10°C to +55°C		
Exit filter	FK6625.300 RAL7032(2012.020)/RAL7035(2012.051)		
Remarks	Special voltage needs can call the inquiry of the Company		

Performance

FK6625....

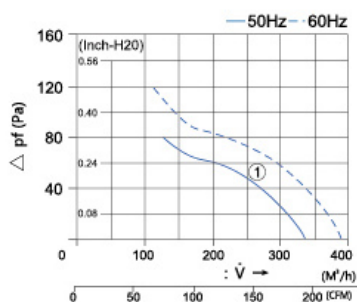

FK6626



Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP43




Available colors: RAL7035
RAL7032

Fans and filters FK 6626....	Fans and filters FK 6626.230	Exit filter FK 6626.300	Drawing FK 6626....

Technical data

Model	FK6626.230	FK6626.115
Available colors	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2012.021/2012.052	2012.022/2012.053
Standard fan	F2E-260B-230	F2E-260B-115
Rated voltage (V / Hz)	230/50/60	115/50/60
Air flow, free blowing	500/560m³/h	
Air flow With export filters	1xFK6626.230:360/390m³/h 2xFK6626.230:440/495m³/h	
Axial Fan	Electric capacitance	
Rated current (A)	0.29/0.33	0.61/0.63
Power (W)	65/77	61/71
Noise level (dB)	62/64	
Operating temperature range	-10°C to +55°C	
Exit filter	FK6626.300 RAL7032(2012.023)/RAL7035(2012.054)	
Remarks	Special voltage needs can call the inquiry of the Company	

Performance FK6626

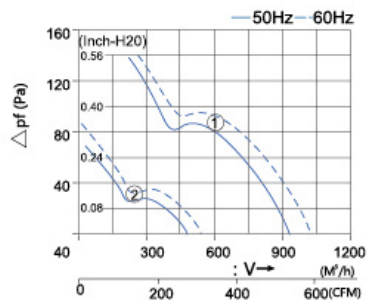

FK6627


Exit Filter

Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP43



LEIPOLE

Performance FK6627.300

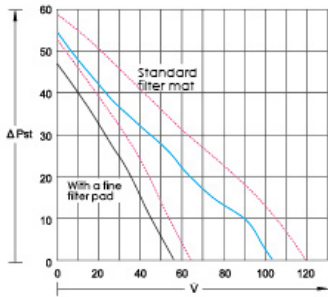


Available colors	Order number
RAL7035	2012.055
RAL7032	2012.024


Features

This design can be fitted with three fans with the size of 120mm*120mm which have more power.

Exit filter only
FK 6627.300

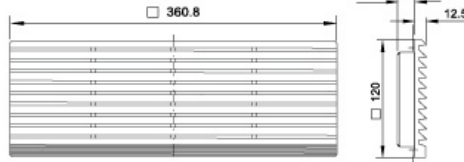

Drawing
FK 6627.300

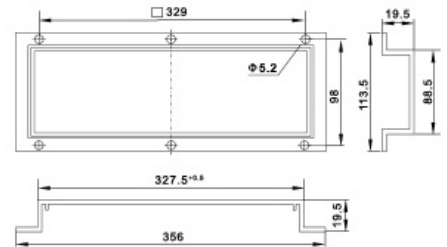

FK 6628 Exit Filter only


Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP43

FK6628

Economic type of FK66 series. This filter can be used with the fans below.

The filter mate is used to prevent dust particles 10 microns or more.

Packing: 2 pcs/pack



	Model	Order number	Model	Order number	Model	Order number	Model	Order number
RAL7032	FK6628.230	2012.030	FK6628.115	2012.029	FK6628.024	2012.028	FK6628.300	2012.025
RAL7035		2012.061		2012.060		2012.063		2012.056
Standard fan	F2E-120S-230		F2E-120B-230		SP1203824H			
Rated current (A)	0.12/0.10		0.24/0.23		0.3			
Power (W)	19/14		18/15		3.5			

Available colors
RAL7035
RAL7032



FK6628.300

