

Current Transformers Narrow profile



NEW



TU60PS



| Secondary Current | | 5A | |
|-------------------|---------------|-----------|-----|
| Bus-Bar (mm) | | 60 X 10 | |
| Cable (mm) | | 50 Ø | |
| Accuracy Class | | 0.5 | 1 |
| Primary Current A | Ordering Code | Burden VA | |
| 400 | TU60PS80 | 5 | 5 |
| 500 | TU60PS100 | 5 | 7,5 |
| 600 | TU60PS120 | 5 | 7,5 |
| 750 | TU60PS150 | 5 | 7,5 |
| 800 | TU60PS160 | 7,5 | 10 |
| 1000 | TU60PS200 | 10 | 15 |
| 1200 | TU60PS240 | 15 | 20 |
| 1500 | TU60PS300 | 15 | 20 |
| 1600 | TU60PS320 | 15 | 20 |

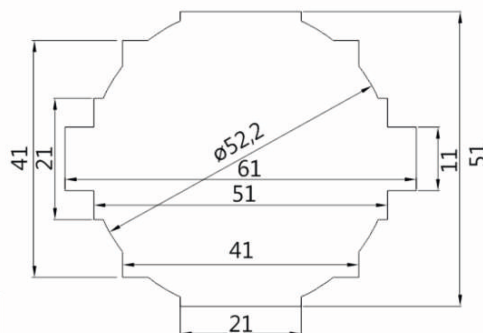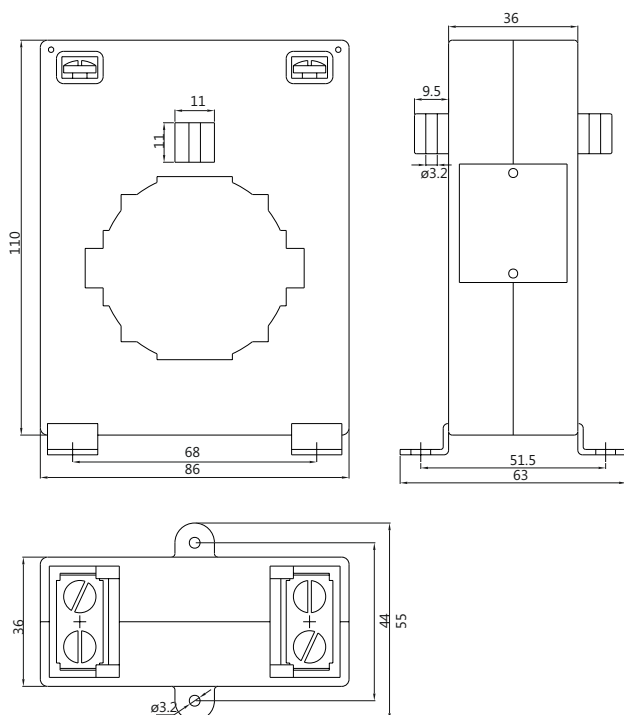

| | |
|---------------|-------------------------------|
| Bus- Bar (mm) | 60 x 10 50 x 20 40 x 40 |
| Cable (mm) | 40 Ø |
| Width (mm) | 86 |
| Height (mm) | 110 |
| Length (mm) | 36 |

